
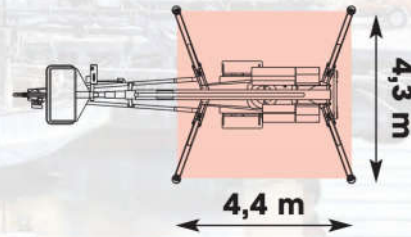


Max. working height

Outrigger cross section

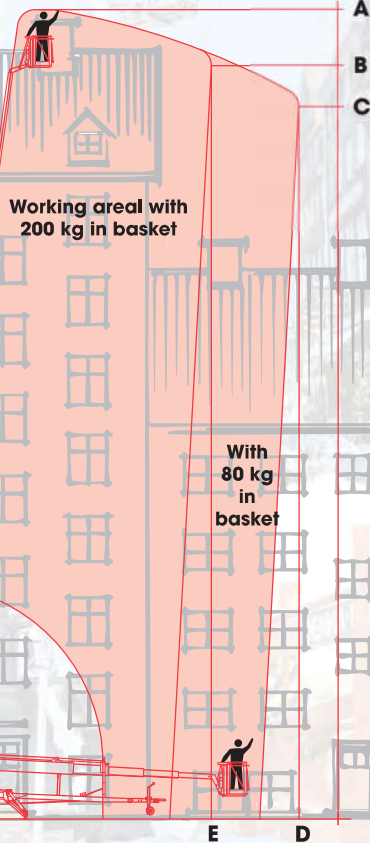

Standard model	DL30
Capacity	
Max. working height A	30,0 m
Working height B	28,3 m
Working height C	27,3 m
Max. reach D	11,6 m
Reach E	8,6 m
Max. load in basket	200 kg
Slew movement	cont. 360°
Transport dimension	
Length L1	8900 mm
Length L2	6380 mm
Height H	2140 mm
Width B	1720 mm
Distance F	900 mm
Net weight standard	3500 kg

STANDARD EQUIPMENT:

- Rotating alu basket 1200 mm
- Battery operation
- Proportional control
- Hydraulic outriggers
- ELCB 30 mA
- Hour counter
- Charging key
- Hydraulic wheel drive from basket

EXTRA ACCESSORIES:

- RAL special colours
- Rotating fibreglass basket 1200mm*
- Brushes in telescope-ends
- Outlet for water/air in the basket*
- Additional power supply (Trafo) 50A/24V*
- Yellow rotating light
- Biological oil
- Petrol engine Honda EU30is / 3,0kVA*
- Height limiting system - 2 steps
- High performance batteries 6V 215Ah / 5h
- Nose wheel*
- Height adjustable wheel axle*
- Self-levelling system

*increase in weight